

MARION COUNTY SURVEYOR'S OFFICE


SECTION CORNER RECORD

DEBRA S. JENKINS
MARION COUNTY SURVEYOR

SEC. 2 TWN. 16_N RNG. 2_E

BRYAN F. CATLIN, PLS
TECHNICAL SUPERVISOR

Date: 6-25-09
Party Chief: Greene
Crew: Taylor
Type of Marker: Stone fd
Method of Establishment: County: 3-25-1975
IN S.P.C. E Zone, NAD 83
Name: 16020204
N: 512 139.239 0(m)
E: 46 653.315 2(m)

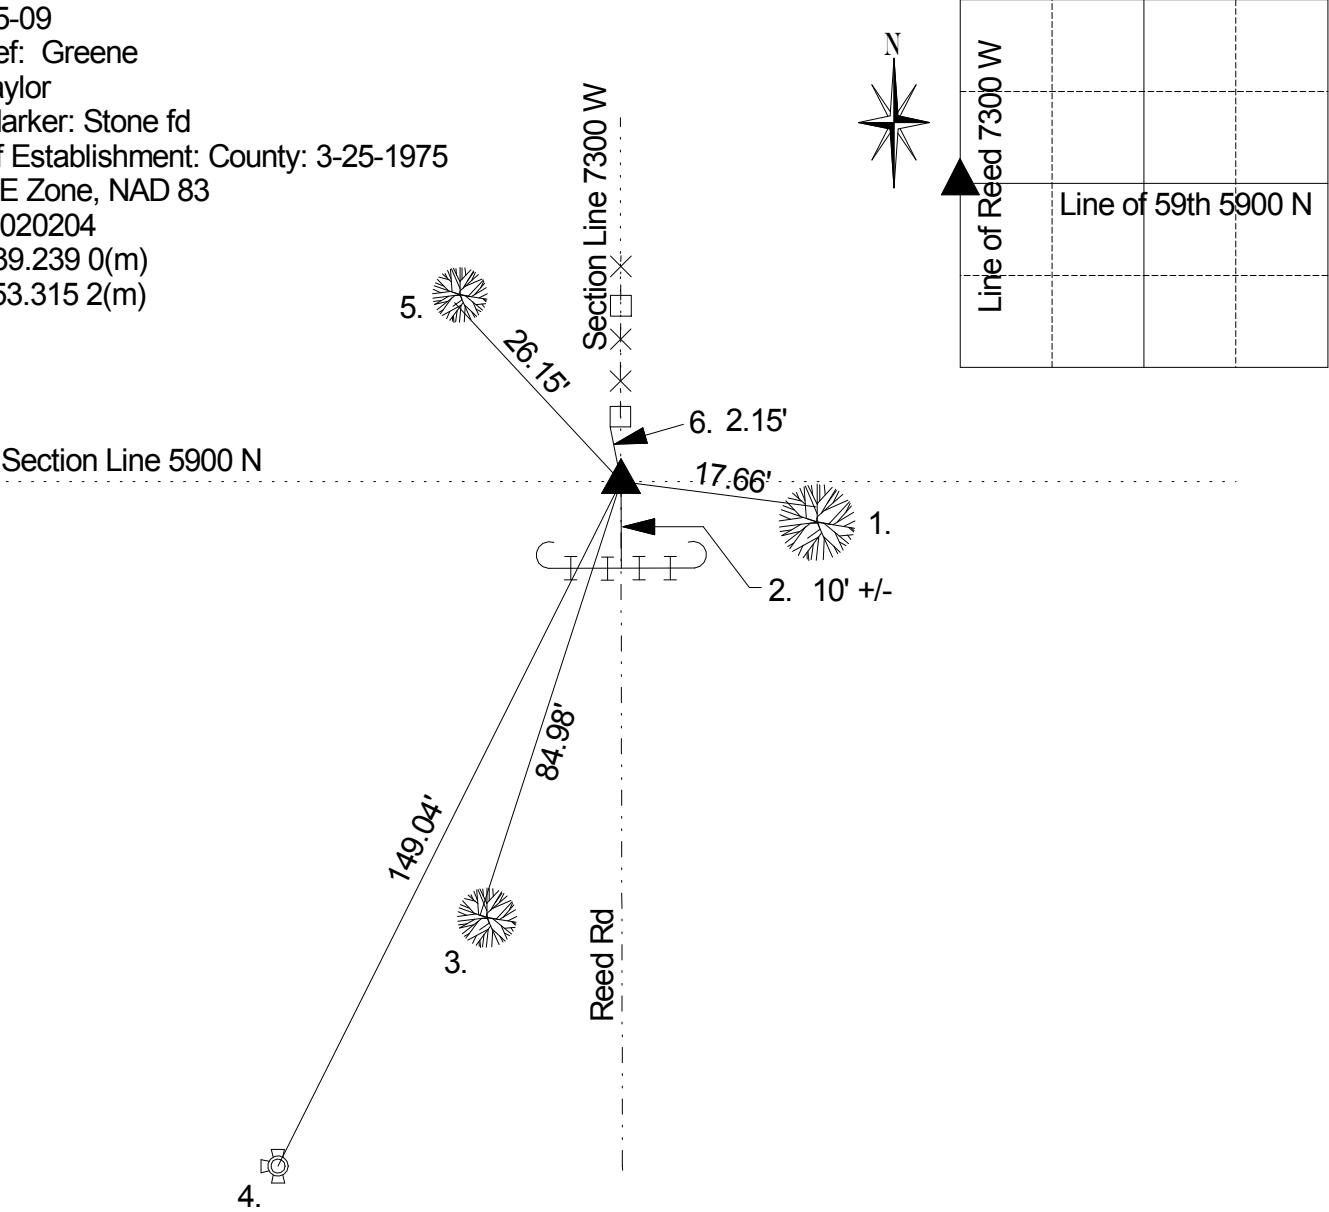

Corner originally set as a post in 1820 by Wm. B. Laughlin with the following witnesses: 12” beech bearing N 46 W 25 links and a 20” dogwood bearing S 21 E 22 links (Marion County Atlas p. 3). A survey by Wm. P. Smith on March 11, 1868 indicates a stone with the following witness: an elm bearing S 37 W 53 links (Pike Legal Book p. 24). A survey by John Coyner on August 3, 1898 indicates a found rock set by former surveyor (Pike Legal Book p. 53). Corner referenced by McLand on 3/25/1975 and called a stone. Corner referenced by Wilcoxen on 5/21/82 and called a stone found at surface of old road. Corner referenced by Wilcoxen on 8/21/1995 and called a stone found. Corner referenced by Kiste on 5/25/2000 and called a stone found. Corner referenced by Kiste on 5/18/05 and called a stone found. Corner referenced by Wilcoxen on 9-5-07 and called a stone found. Corner referenced by Greene on 6/25/09 and called a stone found.

REF.	DISTANCE	DESCRIPTION
1.	17.66'	PK nail w/shiner N 30°maple spur root (mag nail w/washer over)
2.	10' +/-	Due S to guard rail
3.	84.98'	PK nail w/shiner W 18" poplar 12" up (mag nail w/washer over)
4.	149.04'	Top nut of fire hydrant
5.	26.15'	PK nail w/shiner SW 12" poplar 24" up (mag nail w/washer over)
6.	2.15'	PK nail SW 4" x 4" wooden sign post